







RAW DATA. REFINED RESULTS.



DATA ACQUISITION  
**STS4 WIRELESS  
BASE STATION**

# OPERATIONS MANUAL

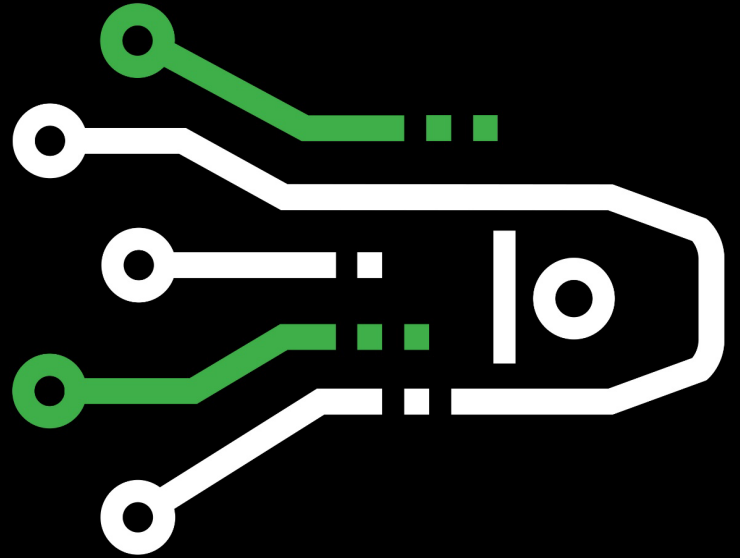

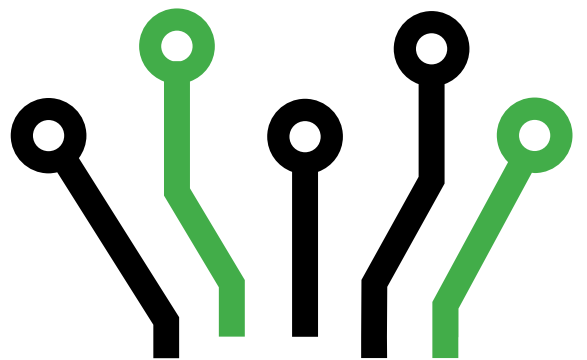

No part of this operations manual may be reproduced, by any means, without the written consent of BDI.

The information contained within this manual is believed to be accurate and reliable. However, BDI assumes no responsibility for errors, omissions, or misinterpretations. The information herein is subject to change without notification.

Copyright © 2019 - 2022

Bridge Diagnostics, Inc. (dba BDI)

## WARRANTY INFORMATION

BDI warrants its products to be free from defects in materials and workmanship under normal use and service for twelve (12) months from the date of shipment. This warranty shall be void if any products have been subjected to modification, misuse, neglect, accidents of nature, or shipping damage. Batteries have no warranty.

All equipment manufactured by BDI is intended for use by a qualified professional only. Under this warranty, BDI's obligation is limited to repairing or replacing (at BDI's option) the defective products. In no event shall BDI be liable for punitive, exemplary, special, indirect, incidental, or consequential damages, and the customer shall assume all costs of removing, reinstalling, and shipping defective products. **EXCEPT AS STATED HEREIN, BDI MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, AND SPECIFICALLY DISCLAIMS ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.**

Before returning any product, BDI technical support must be contacted at +1.303.494.3230 or by visiting [BDITEST.COM/support/](http://BDITEST.COM/support/) and submitting a request. A technician will help determine the nature of the problem, and if it cannot be resolved, authorization will be given to return the item. A return merchandise authorization (RMA) will be sent to the customer to be filled out and shipped back with the equipment. BDI will not accept the shipment of any product without prior authorization, as provided herein.

Ship all equipment to:

**BDI**  
ATTN: TECHNICAL SUPPORT  
740 S PIERCE AVE UNIT 15  
LOUISVILLE CO 80027

+1.303.494.3230

# TABLE OF CONTENTS

- 1. Introduction .....7
  - 1.1 About this Manual.....7
- 2. System Characteristics.....8
  - 2.1 About the STS4-WBS .....8
  - 2.2 Technical Specifications .....8
  - 2.3 Accessories .....10
    - 2.3.1 STS4-WBS Components .....11
    - 2.3.2 STS4-WBS Assembly Procedures.....11
    - 2.3.3 Shipping Requirements .....13
- 3. Power .....13
  - 3.1 Power On/Off.....13
  - 3.2 Battery Status Test.....13
  - 3.3 Wireless Access Point (AP) Power .....14
  - 3.4 Power Sources .....15
    - 3.4.1 Internal Lithium-Ion (Li-Ion) Battery .....15
    - 3.4.2 +24 Vdc External Power Supply.....16
- 4. Communications .....18
  - 4.1 Communication Method .....18
  - 4.2 Computer Requirements & Network Settings.....19
    - 4.2.1 Personal Computer Requirements .....19
    - 4.2.2 Configuring Network Settings .....19
  - 4.3 Wireless Communications.....20
    - 4.3.1 WLAN System Architecture.....20
    - 4.3.2 WLAN Communication Protocols .....23
    - 4.3.3 ALPT Wireless Link .....25
    - 4.3.4 Establishing Wireless Communications .....25
  - 4.4 Wired (LAN) Connections .....27
    - 4.4.1 Fully Wired Configuration.....28
    - 4.4.2 Wired-Wireless (Mixed-Mode) Communications .....29
- 5. Troubleshooting.....30
  - 5.1 Wireless Connectivity Issues.....30
  - 5.2 Wired Connectivity Issues .....31
  - 5.3 Power-Related Issues .....31
  - 5.4 Temperature-Related Issues.....31
  - 5.5 Moisture-Related Issues .....32
- 6. Maintenance & Storage.....32
- 7. Additional Help .....32

## LIST OF TABLES

Table 1: Compatible STS Hardware.....	7
Table 2: Technical Specifications .....	8
Table 3: STS4-WBS Accessories .....	10
Table 4: STS4-WBS Components .....	11
Table 5: Battery Status LED Functions for Charging Batteries using External Supply .....	14
Table 6: Power Sources & Configurations .....	15
Table 7: Li-Ion Battery Technical Specifications .....	15
Table 8: +24Vdc Typical External Power Supply Specifications (varies slightly by manufacturer) .....	17
Table 9: 3-Pin Power Connector Pin-Out .....	18
Table 10: 2.4 GHz WLAN Communication Link Specifications.....	23
Table 11: 5.0 GHz WLAN Communication Link Specifications.....	23
Table 12: ALPT & STS4-WBS Models - Compatibility .....	25
Table 13: 900 MHz ALPT Communication Link Specifications .....	25
Table 14: 2.4 GHz ALPT Communication Link Specifications .....	25
Table 15: Specifications for STS4-WBS LAN and Passive Power over Ethernet (PoE) Support .....	28
Table 16: Ethernet Cable Standards for Passive Power over Ethernet.....	28

## LIST OF FIGURES

Figure 1: STS4-WBS Components .....	11
Figure 2: Wireless STS4-WBS (assembled) .....	12
Figure 3: Power Button and Battery Status Indicator .....	14
Figure 4: AP Power Indicator – Orange LED.....	14
Figure 5: Lithium Ion Battery Pack w/BMM (Courtesy Inspired Energy, LLC) .....	15
Figure 6: Battery Discharge Limits (Courtesy Inspired Energy, LLC) .....	16
Figure 7: Battery Charging Operating Limits (Courtesy Inspired Energy, LLC) .....	16
Figure 8: Typical External 24Vdc Power Supply .....	17
Figure 9: 3-Pin Power Input Connector .....	17
Figure 10: +24 Vdc Power Input Receptacle.....	18
Figure 11: Pinout for +24 Vdc Adapter.....	18
Figure 12: 100% Wireless single STS4-WBS .....	21
Figure 13: 100% Wireless Multiple STS4-WBS .....	22
Figure 14: Wireless radiation pattern for typical omni-direction antennas .....	24
Figure 15: Correct and incorrect antenna positioning.....	24
Figure 16: ALPT Connection Status LED .....	26
Figure 17: AP Communication LEDs .....	26
Figure 18: PC Connection Status LED.....	27
Figure 19: LAN Port Connections .....	27
Figure 20: LED Indicators for Wired LAN Ports.....	28
Figure 21: Wired Ethernet System Configuration using LAN Switch .....	29
Figure 22: Mixed-Mode (Wired + Wireless) Communications using STS4-WBS and LAN Switch.....	30

# 1. INTRODUCTION

Thank you for purchasing the wireless base station designed for use with our 4<sup>th</sup> generation of the Structural Testing System (STS4). BDI has been developing and refining rugged STSs since the early 1990s. This 4<sup>th</sup> generation system includes the latest STS4 Wireless Base Station (STS4-WBS), including a long-lasting lithium-ion battery pack, the latest wireless access point technology, as well as an integrated Automatic Load Position Tracker receiver—all packaged to be used in the difficult field environments that BDI and our clients are accustomed.

This STS4-WBS can be used with any PC with either wireless networking or a standard Ethernet port, along with the BDI-manufactured hardware listed in [Table 1](#).


Table 1: Compatible STS Hardware


<b>STS4-4-IW3</b>	4-Ch Intelliducer Nodes
<b>STS4-4-TE4</b>	4-Ch Terminal Input Nodes
<b>STS4-16-TE4</b>	16-Ch Terminal Input Nodes
<b>STS4-ALPT</b>	Load Position Tracking Hardware
<b>STS3</b>	3 <sup>rd</sup> Gen 4-Ch Intelliducer Nodes


## 1.1 ABOUT THIS MANUAL

This comprehensive document explains the functions and features of the STS4-WBS and includes references to other STS components such as the STS4 Node, Automatic Load Position Indicator (ALPT), and STS-LIVE software. Other STS components are supplied with their own manuals that can also be downloaded from the BDI website.

The following highlighted message blocks will periodically appear and contain important information that the user should be aware of:

 **INFORMATION:** This symbol and corresponding message represents general information and/or tips on successfully operating/configuring the device.

 **WARNING:** This symbol and corresponding message represents vital information and is critical for the device operation and/or the operational settings/configuration.

 **STOP:** This symbol and corresponding message represents information regarding the device that if not followed could lead to damaging the device! Pay close attention to this message.

## 2. SYSTEM CHARACTERISTICS

### 2.1 ABOUT THE STS4-WBS

The STS4-WBS is the central communication hub for fielded STS4 systems that generates the required communication links between all STS4 components. The STS4-WBS broadcasts the Wireless Local Area Network (WLAN) and coordinates communications between:

- + User's Personal Computer (PC)
- + Up to 128 STS4 Nodes
- + Optional Automatic Load Position Tracker (ALPT)
- + Optional Local Area Network (LAN) switches

The Control Unit's rechargeable internal battery will power the STS4-WBS unit for approximately 12 hours and allow the user to control all other STS4 components wirelessly, wired, or through a combination of both.

### 2.2 TECHNICAL SPECIFICATIONS

Table 2: Technical Specifications

MODEL	STS4-WBS-AC000	STS4-WBS-AC900	STS4-WBS-AC024
<b>Control Unit Communication</b>			
<b>AP</b>	10/100 Base-T, +24 Vdc Proprietary (Passive) Power-Over-Ethernet (Connection to Access Point)		
<b>POE</b>	10/100 Base-T, +24 Vdc Proprietary (Passive) Power-Over-Ethernet (Alternative Connection)		
<b>PC</b>	10/100 Base-T (Connection to PC)		
<b>Control Unit Power</b>			
<b>Li-Ion Battery</b>	+10.8 Vdc (Nominal), 8.7 Ah, 93 Wh		
<b>DC Supply</b>	+24 Vdc @ 2.0 Amp (max for charging)		
<b>Access Point</b>			
<b>Type</b>	Dual Band Wireless Access Point		
<b>Model</b>	ENS620EXT		
<b>2.4 GHz Wireless</b>	IEEE 802.11b/g/n, 27 dBm		
	Access Point Mode (wirelessly connect STS4 hardware and PC)		
<b>5.0 GHz Wireless</b>	IEEE 802.11a/n/ac, 27 dBm		
	Bridge Mode (wirelessly connect between multiple STS4-WBS)		
<b>Antennas</b>	Four External 5 dBi Dual-Concurrent Omni-directional, SMA Connector		
<b>Ethernet (LAN) Interface</b>	2 x 10/100/1000 T-Base RJ45 Ports		
<b>Power Source</b>	+24 Vdc Proprietary (passive) Power-Over-Ethernet		
<b>ALPT Transceiver</b>			
<b>Radio Frequency</b>	n/a	900-928 MHz	2.400 - 2.483 GHz



<b>Transmit Power</b>	n/a	200 mW	10 mW
<b>Antenna</b>	n/a	2 dBi Omni Directional (RP-SMA Male)	5 dBi Omni Directional (SMA Male)
<b>Range<sup>1</sup></b>	n/a	4 miles (6.5 km)	2.5 miles (4 km)
<b>Typical Power Consumption</b>			
<b>Base Consumption (no AP or ALPT)</b>	1.5 W	1.7 W	1.6 W
<b>Base Consumption (AP connected)</b>	5.1 W	5.4 W	5.2 W
<b>Typical Power Consumption (AP + ALPT)</b>	5.1 W	5.8 W	5.4 W
<b>Estimated Operating Time<sup>2</sup></b>	18 Hours	16 Hours	17 Hours
<b>Physical</b>			
<b>Protection</b>			
<b>Control Unit</b>	Waterproof		
<b>Access Point</b>	IP55		
<b>Assembled Size (W x L x H)</b>	24 x 24 x 42 in. (610 x 610 x 1220 mm)		
<b>Assembled Weight</b>	10.5 lbs (4.76 kg)		
<b>Temperature</b>			
<b>Operating</b>	-20 °C to +60 °C		
<b>Battery Charging</b>	0 °C to +40 °C		
<b>Storage</b>	-20 °C to +60 °C		
<b>Compliance &amp; Warranty</b>			
<b>Li-Ion Battery</b>	FCC Part 15 Class B, CE		
<b>Access Point</b>	FCC, CE		
<b>ALPT Transceiver</b>	n/a	FCC, IC, CE	FCC, IC, CE
<b>Warranty</b>	12 Months		

<sup>1</sup> The stated range is based on line-of-sight. The range will be reduced with physical interference within the line of sight.

<sup>2</sup> The estimated operating time is based on a new battery operating at room temperature, and time will vary slightly depending on actual conditions.

## 2.3 ACCESSORIES

Table 3: STS4-WBS Accessories

	<p><b>Ethernet Cables:</b> Industrial shielded CAT5e Ethernet cable with IP67 VS 8-pin connector on one end and RJ45 connector on the other end. Supports PoE. Maximum length of 330 ft (100 m) per cable.</p>
	<p><b>Directional Antennas:</b> Enterprise-class long-range antenna</p>
	<p><b>Power Supply (North America):</b> 100-240 Vac to +24 Vdc power supply with M8 connectors. 3 ft (1 m) extension cable</p>
	<p><b>Power Supply (European):</b> 100-240 Vac to +24 Vdc power supply with M8 connector. 3 ft (1 m) extension cable</p>
	<p><b>Shipping Cases:</b> Rugged plastic travel &amp; storage case, variable sizes</p>

### 2.3.1 STS4-WBS Components

The primary components of the STS4-WBS are the Control Unit and a dual-band wireless Access Point (AP) mounted on a tripod with customized clamps.



Figure 1: STS4-WBS Components

Table 4: STS4-WBS Components

Item	Component
1	2.4 GHz Antennas (x2)
2	5.0 GHz Antennas (x2)
3	Wireless Access Point (AP)
4	Wireless Access Point Tripod Mounting Bracket
5	Control Unit Tripod Mounting Bracket
6	Tripod Vertical Pole
7	Tripod Base
8	Control Unit
9	Wireless Access Point to Control Unit Ethernet Cable
10	Computer to Control Unit Ethernet Cable
11	Control Unit Power Supply
12	Optional ALPT Receiver Antenna (900 MHz or 2.4 GHz)

### 2.3.2 STS4-WBS Assembly Procedures

1. Attach the four Antennas (1 & 2) into Antenna Receptacles on Wireless Access Point (3). Be sure to identify the antenna frequency ranges and attach them to their matching receptacles (2.4 GHz vs. 5.0 GHz). Thread each antenna clockwise until secure, do not over-tighten.



**WARNING:** Note that the two antenna frequency ranges connect to opposing diagonal corners of the Access Point. Follow labels on antennas and AP!

- Slide dowel on the back of Wireless Access Point (3) into Wireless Access Point Tripod Mounting Bracket (4) socket with metal slide handle and secure. Do not over-tighten.
- Slide the adjustable Control Unit Tripod Mounting Bracket (5) to the midpoint of the Tripod Vertical Pole (6) and lightly tighten the clamp.
- Attach Tripod Vertical Pole (6) into Tripod Base (7) and extend the three support legs to be 120° apart. Extend the Tripod Vertical Pole (6).
- Attach the Wireless Access Point Tripod Mounting Bracket (4) to the top of the Tripod Vertical Pole (6) and tighten it. The angle of the Wireless Access Point can be adjusted as required to ensure the best signal coverage.
- Attach the Control Unit (8) to the Control Unit Tripod Mounting Bracket (5).
- Using the Wireless Access Point to Control Unit Ethernet Cable (9), connect the Wireless Access Point (3) to the Control Unit (8) AP receptacle.
- If using the ALPT, attach the antenna (12) to the ALPT receptacle on the Control Unit (1).
- If communicating with the STS network in wired mode, using the Computer to Control Unit Ethernet Cable (10), connect between the PC and the Control Unit (8).
- If the Control Unit (8) needs to be charged, connect the Power Supply (11) to an AC source and then plug it into the Control Unit (8) power input receptacle.

The completed STS4-WBS assembly is illustrated in Figure 2.



Figure 2: Wireless STS4-WBS (assembled)

### 2.3.3 Shipping Requirements

BDI wants to ensure that our customers know that the internal lithium-ion (Li-Ion) units utilized in STS4-WBS units are considered Dangerous Goods/Hazardous Materials for shipping purposes. Specific strict rules govern the transportation of lithium-ion batteries and products powered by lithium-ion batteries. These rules, imposed by federal and international regulatory agencies, can be very complex and vary depending on transport mode and battery type.

If you are uncertain about applicable Li-Ion transport rules, BDI recommends you visit the DOT's website for further information: <https://www.phmsa.dot.gov/lithiumbatteries>



**WARNING:** Safety requirements for shipping Li-Ion batteries by both ground and air are continuously updated. Anyone handling shipments that involve Li-Ion batteries should receive the appropriate Dangerous Goods/Hazardous Materials shipping training which is offered by many vendors.



**STOP:** Significant criminal and civil penalties may be applied to *individuals* who improperly ship hazardous materials.

In addition to recommended training, three primary sources for shipping guidelines are:

- + **Ground:** In the United States, the U.S. Department of Transportation provides ground shipment regulations for Li-Ion batteries. Refer to [phmsa.dot.gov/lithiumbatteries](https://www.phmsa.dot.gov/lithiumbatteries) for further information.
- + **Air:** Air shipment requirements are provided by the International Air Transport Association (IATA), which the user should refer to at [iata.org](http://iata.org).
- + **Manufacturer:** Another excellent source for shipping information is provided by the battery manufacturer, Inspired Energy, LLC, at [inspired-energy.com](http://inspired-energy.com).

BDI complies with the latest hazmat delivery guidelines when shipping STS4 systems to and from our facilities and has developed recommended guidelines only for customers returning STS4 systems to BDI, which are available at: <https://bditest.com/downloads/> under "Shipping Documents."

## 3. POWER

### 3.1 POWER ON/OFF

After the internal battery has been charged and/or the power supply is plugged in, press the power button until the red LED shown in [Figure 3](#) turns green. When the button is released, the unit will remain on, and the LED will flash green the entire time that the unit is operational. To turn off the STS4-WBS, depress the power button until all LEDs turn off.

### 3.2 BATTERY STATUS TEST

In addition to controlling the charging parameters, an onboard "fuel gage" is provided that visually displays the five green LEDs shown in [Figure 3](#) to indicate the battery charge level. To activate the meter, momentarily depress and release the power button. The LEDs should light up from left to right, providing the percentage charge associated with each LED lighting sequence outlined in [Table 5](#). The LEDs will remain on for a few seconds before turning off again.

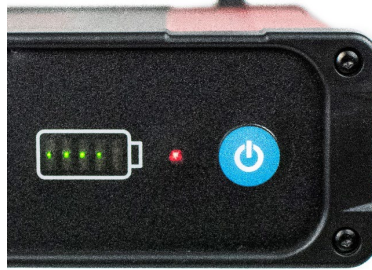


Figure 3: Power Button and Battery Status Indicator

Table 5: Battery Status LED Functions for Charging Batteries using External Supply

Battery Charge	LED 1 Red	LED 1 Green	LED 2	LED 3	LED 4	LED 5
100% - 97%	OFF	ON	ON	ON	ON	ON
96% - 81%	OFF	ON	ON	ON	ON	ON
80% - 61%	OFF	ON	ON	ON	ON	OFF
60% - 41%	OFF	ON	ON	ON	OFF	OFF
40% - 21%	OFF	ON	ON	OFF	OFF	OFF
20% - 0%	ON	OFF	OFF	OFF	OFF	OFF
Overheated	Flashing*	Flashing*	OFF	OFF	OFF	OFF

\* Alternating flashing

### 3.3 WIRELESS ACCESS POINT (AP) POWER

When the power is turned on at the Control Unit, power will automatically be provided to the AP, indicated by the solid orange power LED as seen in Figure 4.

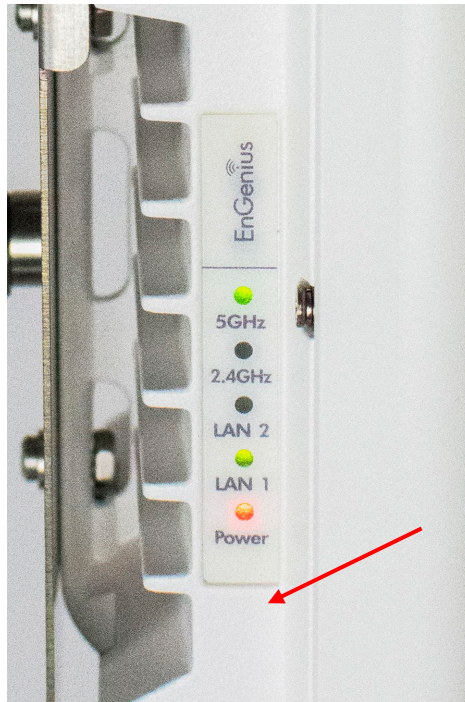


Figure 4: AP Power Indicator – Orange LED

### 3.4 POWER SOURCES

The STS4-WBS operates on its internal Li-Ion battery that is charged with a +24 Vdc Power Supply. When the Power Supply is connected, it will power the STS4-WBS while simultaneously charging the battery.

Table 6: Power Sources & Configurations

Source	Power State	Operation Time
<b>+10.8 Vdc Internal Battery</b>	STS4-WBS Power Only	Approx. 16-18 hours
<b>+24 Vdc Power Supply</b>	STS4-WBS Power + Charge Battery	Indefinite

#### 3.4.1 Internal Lithium-Ion (Li-Ion) Battery

##### BATTERY SPECIFICATIONS

The internal battery pack consists of (9) internal Li-Ion cells assembled in a 3 series/3 parallel (3S-3P) configuration and packaged with an onboard Battery Management Module (BMM) as illustrated in Figure 5. The technical specifications are provided in Table 7.

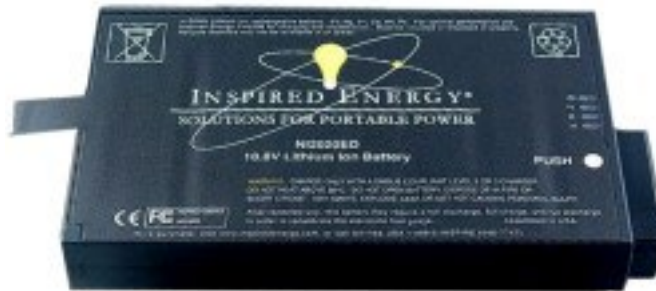


Figure 5: Lithium Ion Battery Pack w/BMM (Courtesy Inspired Energy, LLC)

Table 7: Li-Ion Battery Technical Specifications

Manufacturer	Inspired Energy, LLC
Model	Ni2020HD29
Chemistry	Lithium Ion
Equivalent Lithium Content	0.25 oz. (7.0g)
Capacity	8.7 Amp-Hours (94 Watt-Hours)
Voltage Range	7.6 to 12.6 Vdc, (10.8 Nominal)
Temperature Range	-4° F (-20° C) to 175° F (80° C)
Dimensions	5.9 x 2.4 x 0.9 in (150 x 58.9 x 22.3mm)
Weight	1.12 lbs. (0.506 Kg)

##### BUILT-IN BATTERY PROTECTION

The built-in Battery Management Module (BMM) keeps the unit within its voltage, current, and temperature tolerances to optimize the battery performance and extend its useful life. The BMM also manages the battery’s Discharge and Charging Operating Limits, illustrated in Figure 6 and Figure 7.

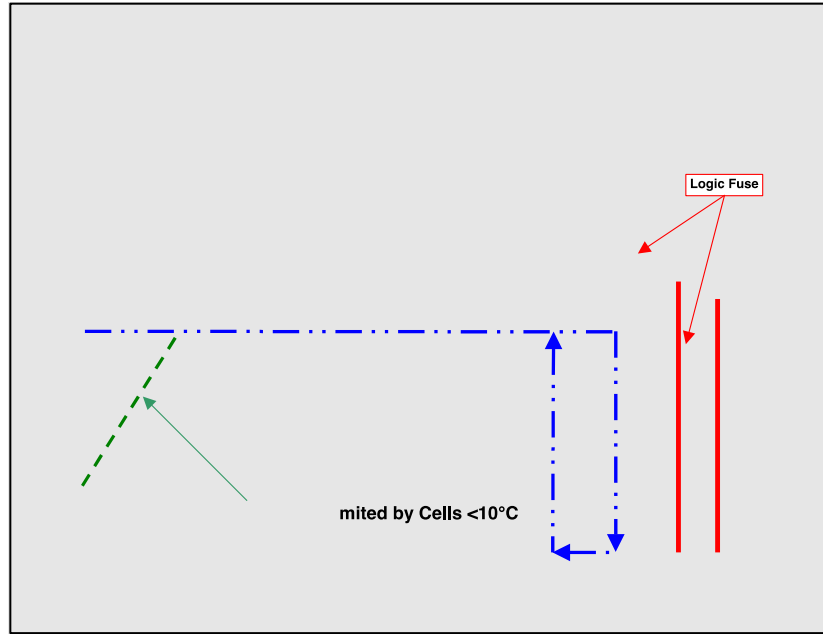


Figure 6: Battery Discharge Limits (Courtesy Inspired Energy, LLC)

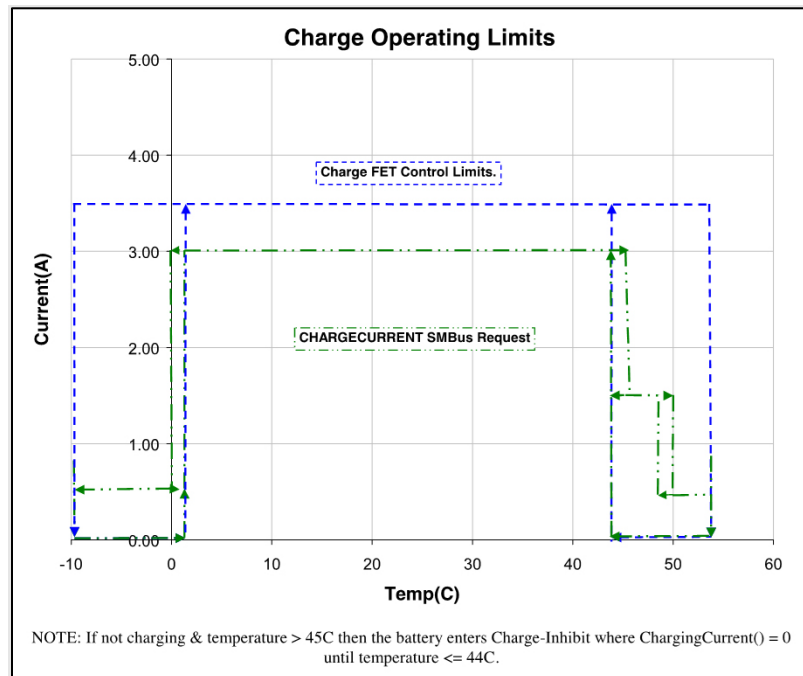


Figure 7: Battery Charging Operating Limits (Courtesy Inspired Energy, LLC)

### 3.4.2 +24 Vdc External Power Supply

Each STS4-WBS is supplied with an external power supply that converts 110-240 VAC to +24 Vdc, as illustrated in Figure 8. This unit provides power for simultaneous STS4-WBS operation and/or battery charging. The standard Power Supply is supplied with a USA AC outlet adapter. However, a wide range of optional AC adapters are available from BDI, depending on the country where the system is being utilized.





Figure 8: Typical External 24Vdc Power Supply

Table 8: +24Vdc Typical External Power Supply Specifications (varies slightly by manufacturer)

<b>Max Output Power</b>	<b>60 W</b>
<b>Input</b>	90~264 VAC, 47-63 Hz, 1.5A (Specify Power Adapter)
<b>Output</b>	+24 Vdc, 2.7A
<b>Leakage Current</b>	0.25 mA
<b>Operating Temp.</b>	32 to 104°F (0 to 40°C)
<b>Storage Temp.</b>	14 to 158°F (-10 to 70°C)
<b>Dimensions</b>	4.5 x 1.85 x 1.28 in (114 x 47 x 32mm)
<b>Weight</b>	0.5 lbs. (230g)

A 3-pin power connector, as shown in [Figure 9](#), threads onto the power receptacle on the back of the STS4-WBS ([Figure 10](#)) and supplies the +24 Vdc required to operate the STS4-WBS while simultaneously charging the battery. Since this scenario requires AC power at the STS4-WBS location, it is usually reserved for charging the battery only or in laboratory conditions where AC power is readily available.

If an alternate +24 Vdc source is to be supplied by the user, the 3-pin connector shown in [Figure 9](#) with the pinout described in [Table 9](#) can be supplied by BDI to allow the user to fabricate custom power cables.



Figure 9: 3-Pin Power Input Connector



Figure 10: +24 Vdc Power Input Receptacle

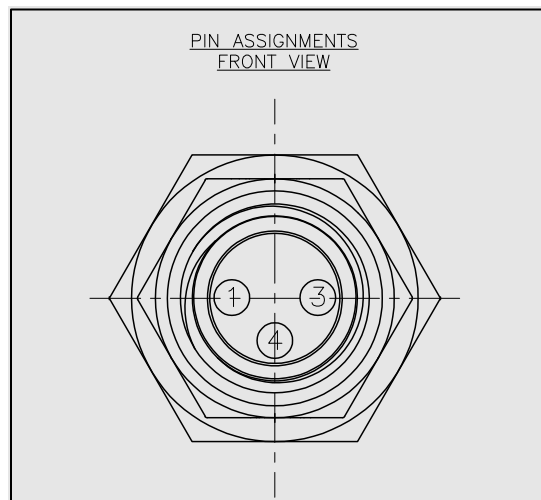


Figure 11: Pinout for +24 Vdc Adapter

Table 9: 3-Pin Power Connector Pin-Out

Pin	Signal
1	+24 Vdc
3	GND
4	n/a

## 4. COMMUNICATIONS

### 4.1 COMMUNICATION METHOD

The STS4-WBS is primarily a battery-powered TCP/IP LAN/WLAN Access Point (AP) that broadcasts the wireless networks and manages all incoming and outgoing communication traffic between the PC and all STS4 components. In addition to the WLAN capabilities required for managing STS4 Nodes, the STS4-WBS can be configured to communicate with additional STS4-WBSs

well as an Automatic Load Position Tracker (ALPT). These optional connections require separate communication links and are described in the sections below.

Various hardware configurations can be utilized to provide maximum flexibility to adapt to a wide range of field conditions. For example, for most short-term testing cases in which all nodes will be placed within several hundred feet of the STS4-WBS, the 100% wireless option is usually the most efficient. However, for applications where nodes are spaced significantly far apart or in a wired Ethernet mode. This option ensures high-quality communication over longer distances and provides the PoE feature that allows the system to operate indefinitely. In other situations, using a combination of wireless and wired configurations may be advantageous.

The flexibility to combine wireless and wired modes stems from using the two-layered Transmission Control Protocol/Internet Protocol (TCP/IP), in which the TCP handles data transmission and the IP guides it to the correct IP address. STS4 systems rely on a completely fixed IP network, meaning BDI has preconfigured all components with assigned IP addresses.

One significant advantage of TCP/IP technology is that it treats the communications links as “transparent,” meaning that wireless and wired links can be freely interchanged as required. The user’s PC must first be configured with a fixed address to operate in this environment, as described in [Section 4.2](#).

## 4.2 COMPUTER REQUIREMENTS & NETWORK SETTINGS

### 4.2.1 Personal Computer Requirements

BDI recommends that a personal computer (PC) with a minimum of a Dual Core Intel i5 processor supported with 8Gb RAM and Windows® 10 Pro) be used to operate STS4 systems consisting of 100 data channels or less. For higher channel count STS4 systems, please get in touch with BDI for recommended PC capabilities. It is also highly recommended to dedicate one PC for running the STS4 rather than having to configure the Windows® Firewall and other third-party internet security applications that often block the STS-LIVE application on various computer operating systems.

### 4.2.2 Configuring Network Settings

Prior to initiating communication with STS4 systems, the PC will need to be configured to act as the control point for the STS4 LAN. Due to the wide variety of available PCs and operating systems, providing detailed configuration instructions for all is not feasible.

#### PC CONFIGURATIONS FOR IP ADDRESS AND SUBNET MASK



**WARNING:** It is important that the computer Network Settings are correct before launching the STS-LIVE application and attempting to establish connections with STS4 components. This is often the first suspect in cases where a connection cannot be established. Please ensure the TCP/IPv4 settings are as follows:

**IP address: 192.168.10.2**

**Subnet mask: 255.255.0.0**

**Default gateway: Blank**

**DNS Settings: Blank**

For further assistance in configuring STS-LIVE and running tests with an assembled STS4 system, please refer to the extensive series of instructional videos available on the BDI website at:

<https://bditest.com/applications-tutorials/>

## PC WINDOWS® FIREWALL AND OTHER SECURITY APPLICATIONS

We recommend that **ALL** Internet security and firewalls be turned off or enter STS-LIVE as a trusted program within any third-party Internet security software (i.e., Norton Internet Security) and Windows® firewall. In most cases, when the STS4 system has initial communication problems (connecting to STS-LIVE), the issue results from the computer's firewall blocking communication. For more details regarding the disabling of security programs, please refer to the operation guide for the specific security program installed on the computer.

## 4.3 WIRELESS COMMUNICATIONS

### 4.3.1 WLAN System Architecture

The communications capability of the STS4-WBS is provided by an internal Access Point (AP) that broadcasts the Wireless Local Area Network (WLAN) and manages all incoming and outgoing traffic between the STS4 nodes and the PC. All STS4-WBS units supplied by BDI are preconfigured with the "STS" network name (SSID) and should be visible to the computer's wireless network tool/application when configuring network settings. [Figure 12](#) illustrates the standard STS4 wireless system configuration.

Through STS-LIVE, the STS4-WBS is capable of providing three separate wireless links as follows:

- + Standard: WLAN 2.4 GHz link for TCP/IP communication between the PC and all STS4 Nodes
- + Standard: WLAN 5.0 GHz "backhaul" link for transparent TCP/IP communication between multiple STS4-WBS units
- + Optional: 900 MHz/2.4 GHz serial link for communication between STS4-WBS and Automatic Load Position Tracker (ALPT)

When the STS4 Nodes, STS4-WBS, and PC are connected and controlled through STS-LIVE using the 2.4 GHz WLAN (specifications in [Table 10](#)), the primary IP address is linked to the STS4-WBS while each node is assigned a subdivision IP address. This configuration can support up to 128 nodes with a single STS4-WBS.

As soon as the STS4-WBS has established communications with the PC running STS-LIVE, it will establish the LAN/WLAN Service Set Identifier (SSID) network required to allow nodes to connect to STS-LIVE. The TCP/IP communication protocol directs data to each component based on its unique name and network address.

Multiple customized STS4-WBS units can communicate through the separate 5.0 GHz WLAN "backhaul" wireless link, which allows expansion of the testing range, as shown in [Figure 13](#). Optional directional antennas from BDI can allow for long-range communications, meaning that two instrumented areas separated by very long distances can be tested simultaneously.

**100% WIRELESS MODE CONFIGURATION**

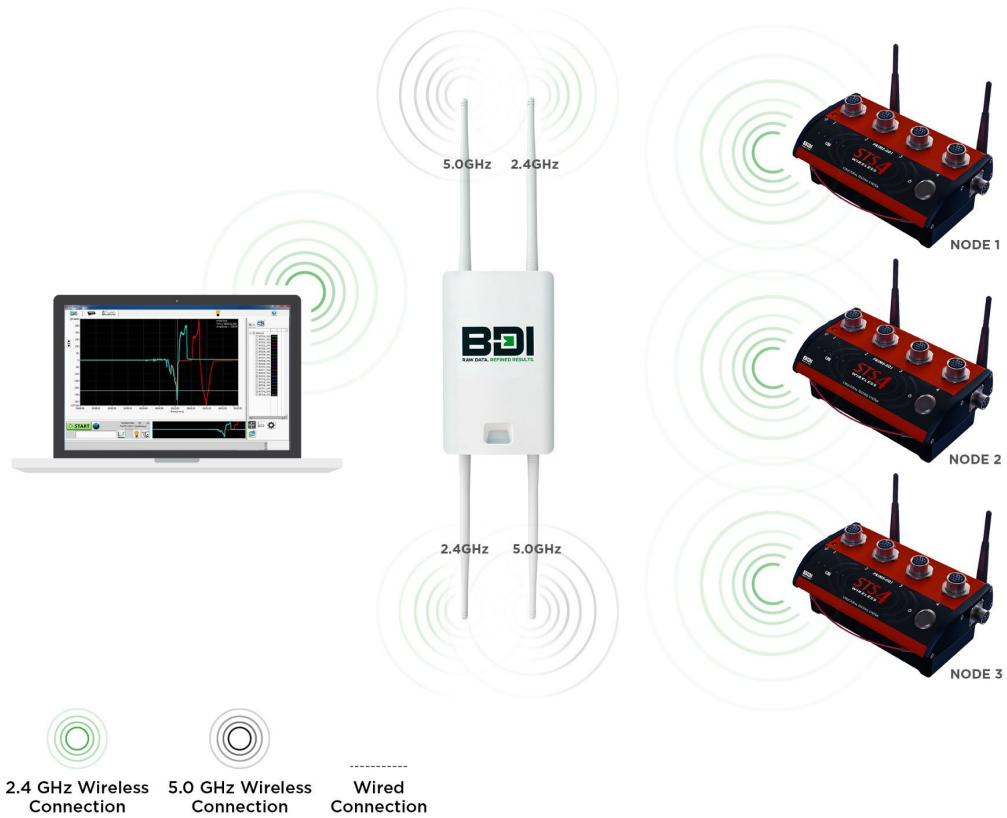


Figure 12: 100% Wireless single STS4-WBS

**100% WIRELESS MULTIPLE BASE STATION CONFIGURATION**

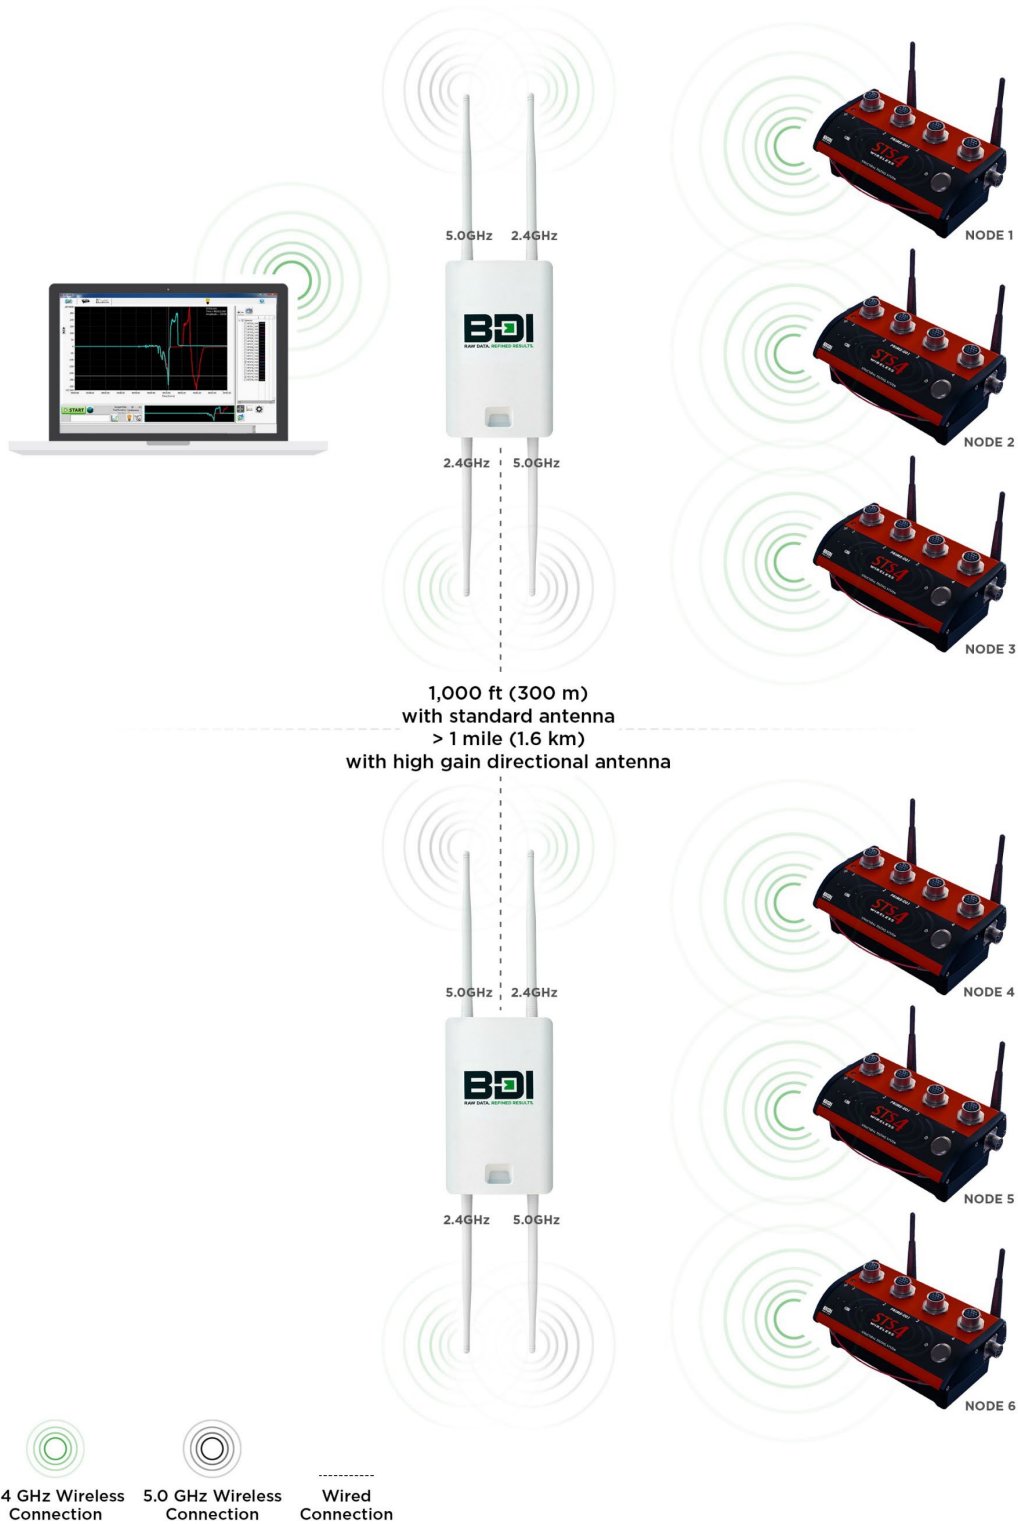


Figure 13: 100% Wireless Multiple STS4-WBS



### 4.3.2 WLAN Communication Protocols

The STS4-WBS broadcasts two WLANs, one at 2.4 GHz and the other at 5.0 GHz. Each WLAN controls the components listed in Table 10 and Table 11.

#### 2.4 GHZ WLAN NETWORK LINKS

Table 10: 2.4 GHz WLAN Communication Link Specifications

Feature	Description
Components Linked	PC, STS4-WBS, and STS4 Nodes
TCP/IP Protocol	IEEE 802.11b/g/n
Frequency Bands	2.400 – 2.500 GHz
Transmit Power	27 dBm
Transmission Range	~500ft (150m), line of sight (approx. 3,000 sq. ft )

#### 5.0 GHZ WLAN NETWORK LINKS

The 5.0 GHz STS4-WBS communication backhaul links, as illustrated in Figure 13, are broadcast through the standard AP unit is typically configured by BDI when the STS4-WBS is purchased; however, if a second STS4-WBS is purchased after the first unit is purchased, the 5.0 GHz link must be set up by the user. Since the model and features frequently change with the APs, please get in touch with BDI directly to get the procedures for setting up the 5.0 GHz link. Table 11 provides the 5.0 GHz communication link specifications. Note that Long Range communications between STS4-WBS units can be accomplished with directional antennas. Please get in touch with BDI for further information.

Table 11: 5.0 GHz WLAN Communication Link Specifications

Feature	Description
Components Linked	Multiple STS4-WBS units
TCP/IP Protocol	IEEE 802.11a/n/ac
Frequency Bands	5.15-5.25 GHz, 5.25–5.35 GHz, 5.47-5.725 GHz, 5.725-5.850 GHz
Transmit Power	27 dBm (adjustable)
Transmission Range	~500ft (150m), line of sight (approx. 3,000 sq. ft ) Up to 6,000 ft (1,800m) Directional Antennas

#### WLAN ANTENNA POSITIONING

All STS4 components antennas should be oriented such that the wireless radiation pattern between the STS4-WBS and the STS4 nodes and PC overlap. Figure 14 shows the typical radiation pattern for the omni-direction antenna types used in the STS4-WBS and STS4 nodes. This typical radiation pattern shows that the primary direction of the wireless signal radiates outward from the antenna in a “donut” pattern, meaning that the antenna positions should always be parallel to each other and aligned so that the radiation pattern overlaps. Figure 15 illustrates correct and incorrect antenna positioning.

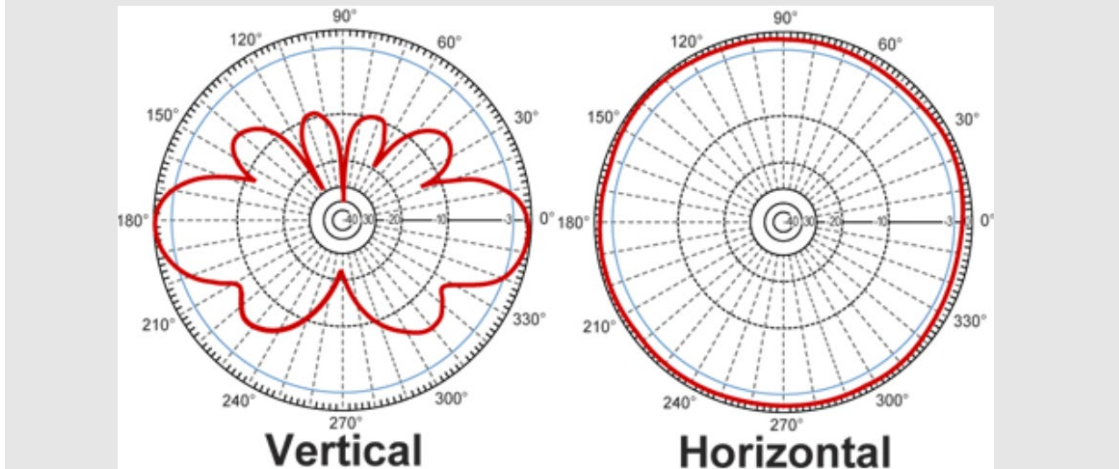


Figure 14: Wireless radiation pattern for typical omni-directional antennas

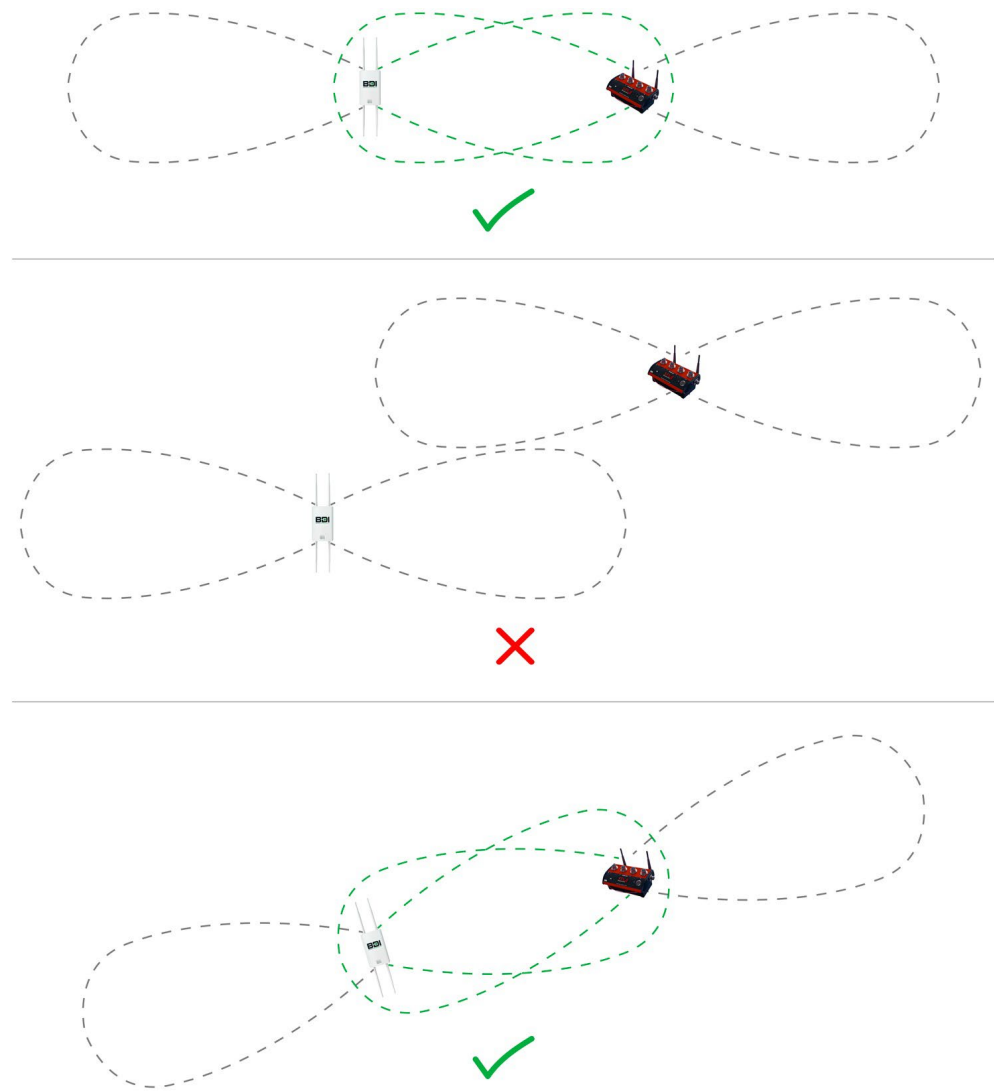


Figure 15: Correct and incorrect antenna positioning



### 4.3.3 ALPT Wireless Link

If an Automatic Load Position Tracker (ALPT) is used, it connects to either the 900 MHz or 2.4 GHz link according to the geographic location, as outlined in Table 12.

Table 12: ALPT & STS4-WBS Models - Compatibility

Geographic Location	ALPT Model	STS4-WBS Model	Frequency
All	No ALPT	STS4-WBS-AC000	N/A
U.S. & North America	STS-ALPT-01	STS4-WBS-AC900	900 MHz
World, excluding North America	STS-ALPT-02	STS4-WBS-AC024	2.4 GHz

#### 900 MHZ LINK

Table 13: 900 MHz ALPT Communication Link Specifications

Feature	Description
Components Linked	STS4-WBS-AC900 to STS4-ALPT-01 (U.S. & North America)
Output Power	200mW
Frequency Bands	900 - 928 MHz
Transmission Range	Up to 4 miles (6.5 km) Line-of-Sight

#### 2.4 GHZ LINK

Table 14: 2.4 GHz ALPT Communication Link Specifications

Feature	Description
Components Linked	STS4-WBS-AC024 to STS4-ALPT-02 (All except North America)
Output Power	10mW
Frequency Bands	2.400 – 2.483 GHz
Transmission Range	2.5 Miles (4 km) Line-of-Sight

### 4.3.4 Establishing Wireless Communications

When the power switch is activated and the communication link between the Control Unit and AP has been fully established, the STS4-WBS will immediately broadcast the 2.4 GHz WLAN and, if applicable, the ALPT radio link and attempt to connect to the user’s PC and STS4 Nodes in the vicinity. The Ethernet LED indicator illustrated in Figure 16 and the AP LEDs shown in Figure 17 will flash intermittently during the entire time the STS4-WBS is operational.

When the STS4-WBS has established a successful wireless connection to STS-LIVE running on the PC, the LED adjacent to the PC Ethernet port shown in Figure 18 will continuously flash blue.

If an Automatic Load Position Tracker (ALPT) is present, the blue ALPT LED shown in Figure 16 will indicate when a successful wireless link has been established.



**INFORMATION:** The STS4-WBS may require up to two minutes to boot up and establish the Wireless Local Area Network (WLAN) before it can be detected by the PC.

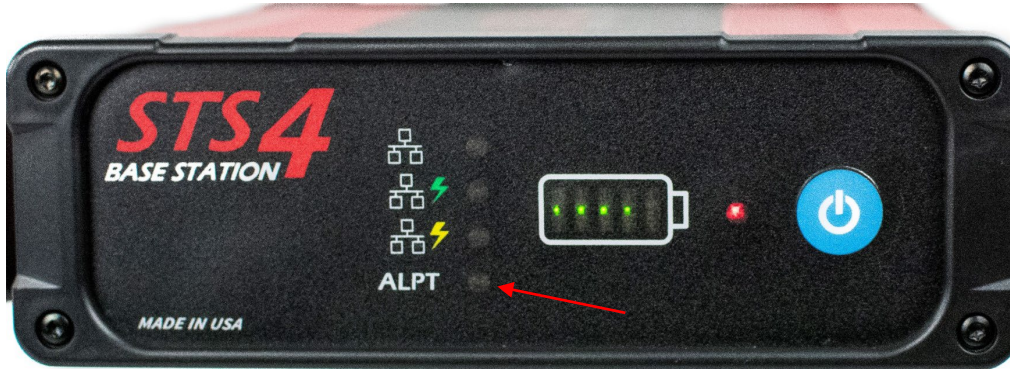


Figure 16: ALPT Connection Status LED



Figure 17: AP Communication LEDs

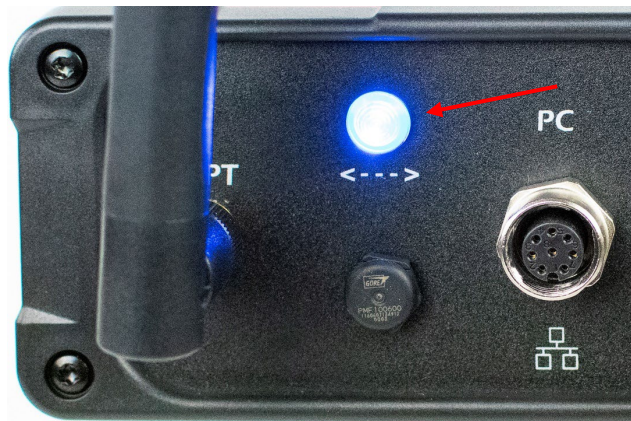



Figure 18: PC Connection Status LED

## 4.4 WIRED (LAN) CONNECTIONS

In some scenarios (either because of power or communication issues), it is advantageous to use STS4 Nodes in a “wired” mode, meaning that communication is facilitated through the standard Ethernet protocols described in Table 15 and connected as outlined in sections 4.4.1 and 4.4.2. Note that all LAN cables require specialized circular connectors that mate with the STS4-WBS receptacles on the rear of the unit, illustrated in Figure 19. The LAN icons below each connector match the LAN data traffic indicator LEDs on the front of the unit shown in Figure 20.

Each LAN port is dedicated to a specific “branch” of the STS4 testing system as follows:

- + **Access Point:** This LAN port is permanently connected directly to the onboard AP to provide wireless capabilities. Note that this link also provides +24 Vdc passive PoE for powering the AP.
- + **PC:** Provides a hardwired communication link to a PC—no PoE on this port.
- + **PoE:** Utilized for a +24 Vdc passive PoE LAN-powered external device or for directly communicating and powering the STS4-4-TE4 and STS4-16-TE4 nodes.



**WARNING:** Note that the STS4-WBS does NOT connect directly to STS4 Nodes, an intermediate network switch must be utilized.



Figure 19: LAN Port Connections














Figure 20: LED Indicators for Wired LAN Ports

Note that BDI does not manufacture the network hardware since it is available off-the-shelf from many commercial sources. It is recommended that high-quality shielded CAT5e or better cable be utilized to reduce potential communication degradation in “noisy” environments.

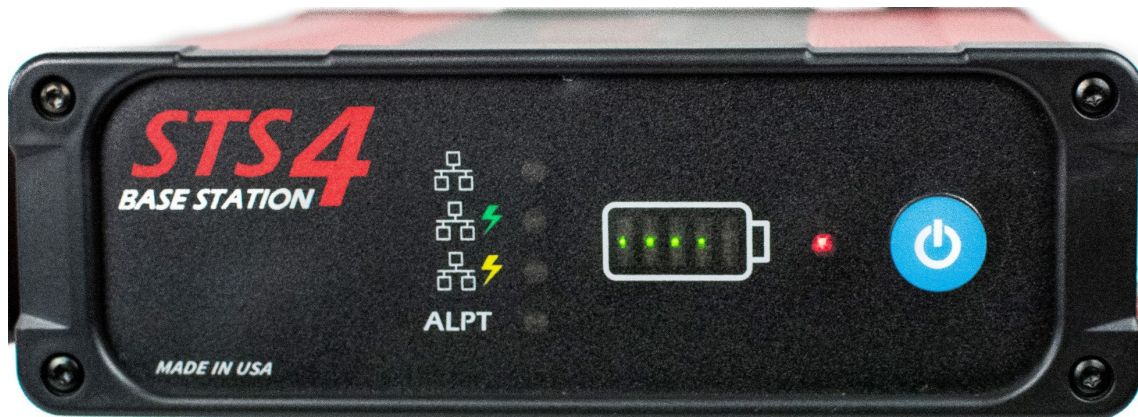Table 15: Specifications for STS4-WBS LAN and Passive Power over Ethernet (PoE) Support

<b>Ethernet Standard</b>	IEEE 802.3
<b>Power Over Ethernet</b>	Proprietary passive +24 Vdc
<b>Power Draw from STS4-WBS</b>	24 W Max (Combined between PoE port and AP port)
<b>Supported cabling</b>	Cat5e (or better)
<b>Max Cable</b>	100m (330 ft )

Table 16: Ethernet Cable Standards for Passive Power over Ethernet

RJ45 Connector	T568B Color (BDI Standard)	Description
Pin 1		+ Data Transmit
Pin 2		- Data Transmit
Pin 3		+ Data Receive
Pin 4		+ Vdc (+24Vdc)
Pin 5		+ Vdc (+24Vdc)
Pin 6		- Data Receive
Pin 7		- Vdc (GND)
Pin 8		- Vdc (GND)

#### 4.4.1 Fully Wired Configuration

If field conditions warrant that the system is operated in a fully wired configuration, the STS4-WBS is unnecessary unless an ALPT is in use. As illustrated in Figure 21, an “off-the-shelf” network switch is utilized. The network can be supported by any switch or combinations of switches that support the IEEE 802.3af protocol. BDI does not manufacture or support Ethernet switching components. If additional support is required for configuring switching components, contact your IT Support Department.

**i** **INFORMATION:** The STS4-WBS is NOT required in the wired only scenario unless an ALPT is in use. Off-the shelf network switches may be utilized in its place as the central LAN interface.

**100% WIRED CONFIGURATION**

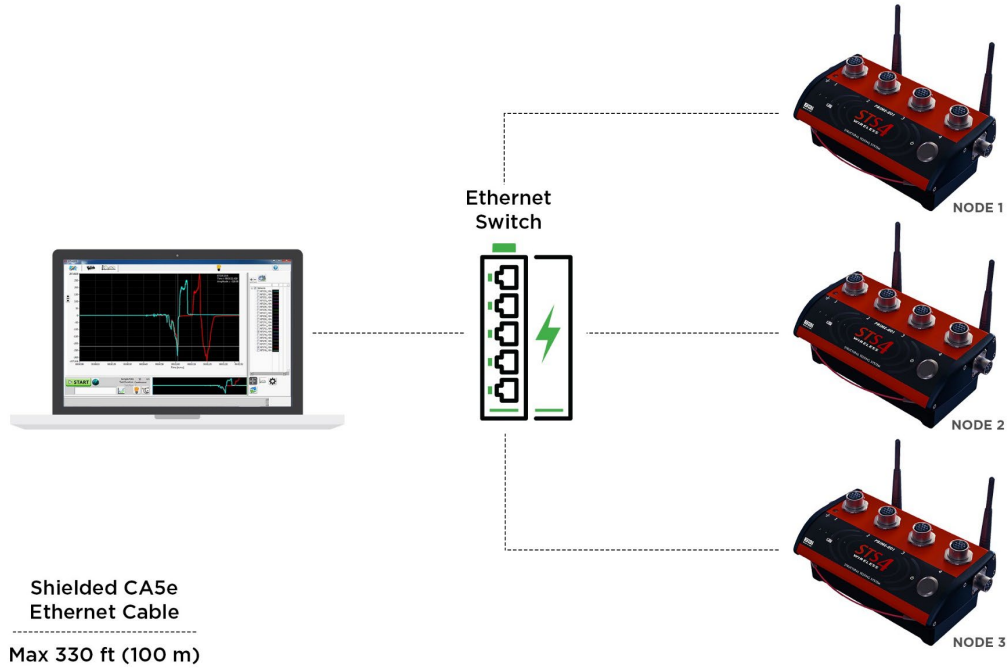


Figure 21: Wired Ethernet System Configuration using LAN Switch

**4.4.2 Wired-Wireless (Mixed-Mode) Communications**

The wired TCP/IP LAN protocol dovetails with the wireless TCP/IP network protocol, meaning that both communication links are essentially “transparent” to all STS4 components. This design feature allows full interchangeability between wired and wireless links, as illustrated in Figure 22.

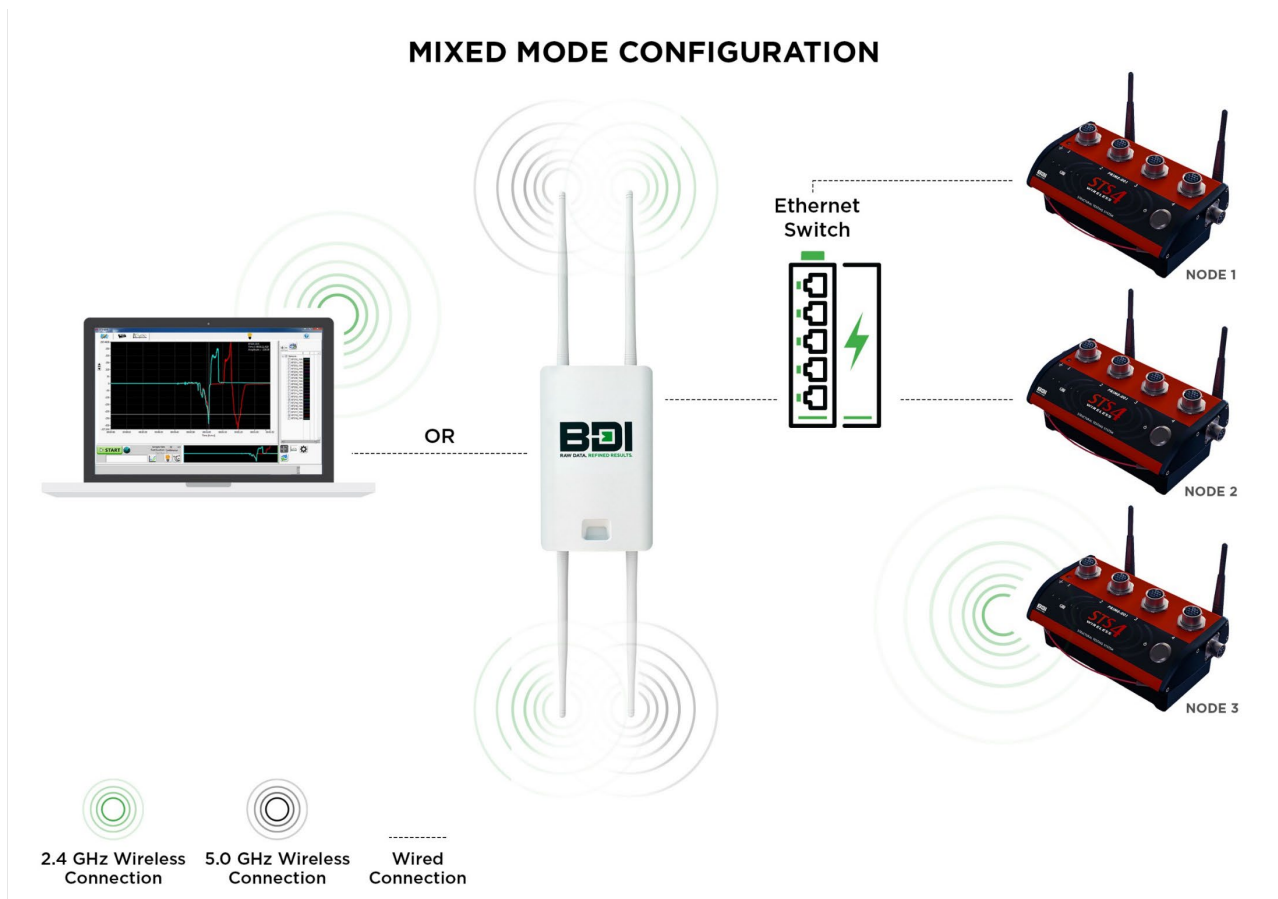


Figure 22: Mixed-Mode (Wired + Wireless) Communications using STS4-WBS and LAN Switch

## 5. TROUBLESHOOTING

Before mobilization, the best way to avoid equipment-related field delays is to test the fully-assembled system in the office/laboratory thoroughly. Typical problems encountered in the field usually involve communication and/or power issues. The sections below are some basic troubleshooting tips for common problems and are not intended as an exhaustive guide. If the problem cannot be addressed by the basic troubleshooting items outlined in this section, please get in touch with BDI directly for additional support.

### 5.1 WIRELESS CONNECTIVITY ISSUES

BDI has attempted to mitigate wireless interference while designing and developing STS4 systems. However, all wireless connection links can be susceptible to interference from nearby sources operating the 2.4GHz, 5.0GHz, or 900MHz frequency ranges, such as:

- + Microwave towers
- + Microwave ovens
- + Cell phones
- + Bluetooth devices
- + Wireless speakers
- + High-voltage power lines
- + Energized third rails for railroads
- + Power generation facilities

Some solutions to mitigate interference include:

- + Relocate the PC closer to the STS4-WBS to improve signal strength.
- + Connect the PC directly to STS4-WBS with a Cat5e cable.
- + If possible, relocate STS4 hardware and STS4-WBS further away from the source of interference.
- + Create a physical barrier between the interference source and STS4 hardware, such as metal or concrete barriers. Less-effective barriers are wood, plastic, or glass barriers.
- + Eliminate wireless links by reconfiguring the system into the wired mode, as described in [Section 4.4](#).
- + If possible, relocate STS4 hardware to be within line of sight of STS4-WBS.
- + Connect STS4 nodes directly (or through an Ethernet switch) to STS4-WBS with a Cat5e cable. A network switch will be required if multiple nodes are experiencing issues since the STS4-WBS has only one cable receptacle.

## 5.2 WIRED CONNECTIVITY ISSUES

Very little can go wrong with a wired connection with the STS4 hardware. If a connection to the hardware cannot be established, even after rebooting the hardware, there are only a few items that could potentially cause the problem:

- + **Damaged Ethernet cable:** Inspect the length of the cable for any damage and inspect all RJ45 connectors for integrity. Swapping suspected CAT5e cables with new cables can assist in verifying damaged units.
- + **Poor quality Ethernet cable:** High-quality shielded CAT5e should be used as lower quality cable is more susceptible to signal interference.
- + **Verify cable connections:** Double-check that the Ethernet connectors are correctly plugged into the STS4-WBS hardware and the PC, AP, or alternate device (Ethernet Switch).
- + **Component Damage:** It is always possible that a component of the STS4-WBS could be damaged through use or shipping. Inspect all components carefully for signs of damage, particularly around the Ethernet cable connections.

## 5.3 POWER-RELATED ISSUES

The following represents the most common issues that can occur with Li-Ion battery packs if they have already been determined to have sufficient charge:

- + **Overheated Battery:** Battery LEDs will flash alternating yellow/red when the battery is overheated. The STS4-4 node should be taken to a location where it can cool down sufficiently before attempting to power up or charge the node again.
- + **Damaged Battery:** If the battery circuitry is damaged, the battery status LED will flash red. Damage can occur if the battery overheats too much or one of the internal components is damaged. The STS4-4 node will need to be returned to BDI for replacement.
- + **Loss in Capacity:** After many (>300) battery charge/discharge cycles, the battery's capacity will begin to diminish. If the charge to the battery has lost significant capacity after a full charge, then it is likely time to replace the battery. The STS4-4 node will need to be returned to BDI for replacement.

## 5.4 TEMPERATURE-RELATED ISSUES

STS4-WBS units contain internal temperature sensors that monitor the circuitry and battery. If either sensor exceeds the over-temperature threshold, the STS4-WBS will automatically power down to prevent component damage. The shutdown limit of the Li-Ion battery pack is approximately +85°C when it is in the discharge mode and approximately +55°C when charging. It is possible to reach either of these limits if the system operates at full capacity outdoors in direct sunlight. If this occurs, the charging will shut down along with the power supply to the STS4-4 hardware. Depressing the power button momentarily to check the battery status, the battery LED shows the first LED blinking, alternating between yellow and red.

It is good practice to locate STS4 components in shaded areas whenever possible. If that is not possible and the temperature is reaching the operating limit, then an alternate solution can be to cover the hardware with a cloth, or similar, to protect against direct sunlight. The STS-LIVE application will warn the user when the operating limit is near.

## 5.5 MOISTURE-RELATED ISSUES

STS4-WBS units have been designed to be used in harsh outdoor environments, meaning they are dust tight and able to withstand water spray (e.g., rain) without moisture intrusion. All dust caps must be secured to maintain a water seal on the Control Unit.

The STS4-WBS cannot be submerged underwater. If this occurs, the unit should be powered down as soon as possible and then contact BDI for evaluation.

## 6. MAINTENANCE & STORAGE

With careful handling and storage, STS4-WBS units should provide many years of use, with the only limitations being battery life and potential changes in future IEEE network communication protocols.

- + Periodically inspect housing and all connector receptacles.
- + Keep the unit clean.
- + Store STS4-WBS units with a minimum of 20-40% battery charge.
- + Store in cool, dry, and ventilated area.
- + Store units in rugged transit cases similar to those supplied by BDI.
- + The STS4-WBS must be returned to BDI for repairs if any maintenance is required. Please refer to the Warranty information at the beginning of this manual for further details.

## 7. ADDITIONAL HELP

Refer to the Contact Us page at [www.bditest.com](http://www.bditest.com) and/or call with questions at [+1.303.494.3230](tel:+13034943230).








RAW DATA. REFINED RESULTS.

**DATA YOU CAN TRUST.  
RESULTS YOU CAN BUILD ON.**

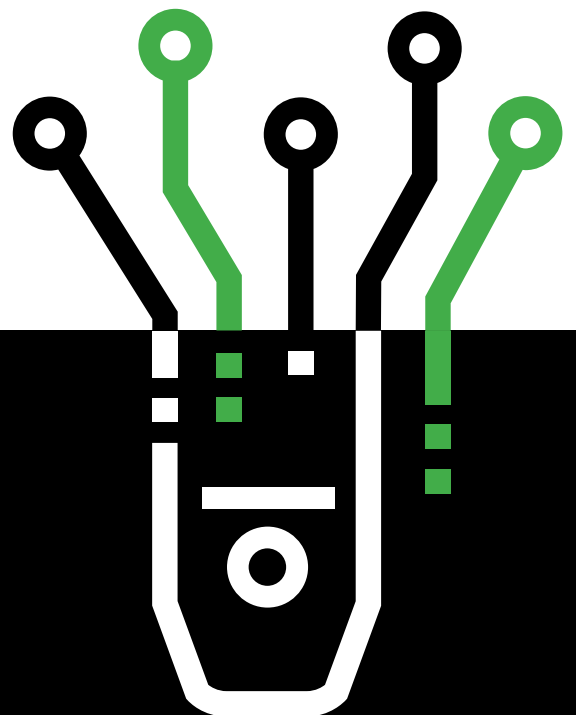

P +1.303.494.3230 740 S PIERCE AVE UNIT 15  
F +1.303.494.5027 LOUISVILLE CO 80027

BDITEST.COM  
sales@bditest.com