

## General Information and Selection

### TOOLS



#### GT-11 Camel's Hair Brush:

3/8 in [9.5mm].

#### SPT-1 Stainless Steel Mixing Spatula:

Double blade. Overall length 8 in [200mm].

#### SPT-2 Stainless Steel Mixing Spatula:

Single blade. Overall length 7-3/4 in [195mm]. Wooden handle.

#### HTC-1 Temperature Controlled Hotplate:

Temperature range +100° to +600°F [+40° to +315°C]. Calibrated bimetallic thermostat. 3-1/2 in [90-mm] diameter aluminum alloy top plate. Embedded heating elements for high thermal conductivity. 120 Vac 6-ft [1.8-m] linecord, 3-wire plug.

#### MHG-1 Master Mite Heat Gun:


Lightweight, compact, perfectly balanced. 2 lb [0.9kg] with nozzle attached. 8-7/8 x 7 in [225 x 180mm]. Quiet, brushless-type shaded pole motor rated for continuous duty. Three interchangeable nozzle heating elements control average outlet temperature 1/2 in [13mm] from nozzle at +500°F [+260°C], +650°F [+345°C], or +800°F [+425°C]. Air-cooled barrel. Three-conductor grounded linecord. Slip-on deflector completely surrounds shrinkable tubing (HST-1) with heat. Pinpoint adapter directs heat without affecting adjacent areas. 120Vac, 60Hz. Maximum current draw 5.4 amps.

#### MHG-2 Master Mite Heat Gun:

Same as above, except 220Vac.



### GENERAL-PURPOSE TAPES & MATERIALS

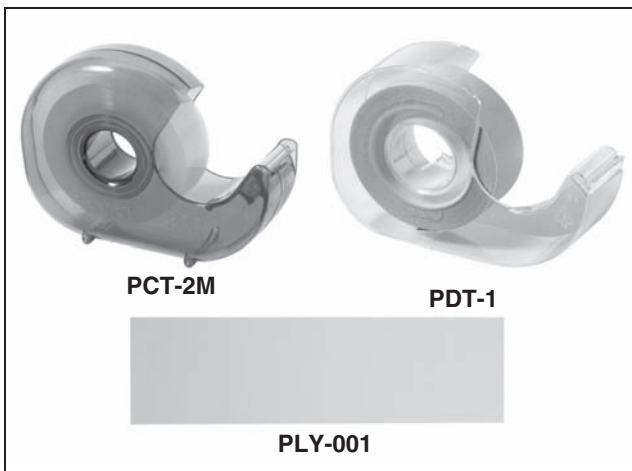

#### PCT-2M Gage Installation Tape:

For gage handling. 3/4 in x 75 ft [19mm x 23m].

#### PDT-1 Paper Drafting Tape:

For soldering mask, and lead positioning. 3/4 in x 400 in [19mm x 10m].

#### PLY-001 Kapton® Film:

For electrical insulation, 4 x 10 x 0.001 in thick. [100 x 250 x 0.02mm thick].



**RoHS**  
COMPLIANT

Kapton is a Registered Trademark of DuPont.